



10" sRGB Portable Monitor (Touch Edition)

- Ultra-Portable 10.5-Inch Form Factor

Your On-Demand Mobile Workspace

- Single-Cable Convenience with Dual USB-C Ports

Cut Clutter, Boost Efficiency

- Flexible Mounting

VESA Holes + Included Magnetic Stand for Any Setup

- Global-Ready 33W Multi-Plug Adapter

Power Up Anywhere, No Extra Gear

- Built-In Dual Stereo Speakers

Space-Saving Audio for Meetings & Media

- 8-Bit Color Depth (16.7M Colors)

Accurate Visuals for Detail-Critical Tasks

- HDR Support

Enhanced Contrast for Vibrant, Clear Displays

- IPS 178° Wide-Viewing-Angle Panel

Elevate Collaboration & Visual Consistency

- Low-Blue-Light Screen

Protect Eyes During Extended Use

10.5"

10.5 Inch

Dual USB-C

Dual USB-C

Support VESA

Support VESA

Touch Control

Touch Control

HDR

HDR Support

Built-in Dual Speakers

Built-in Dual Speakers

Replaceable Plug Adapter

Replaceable Plug Adapter


178°

IPS 178° Viewing Angle

Low Blue-Light

Low Blue-Light

Product view

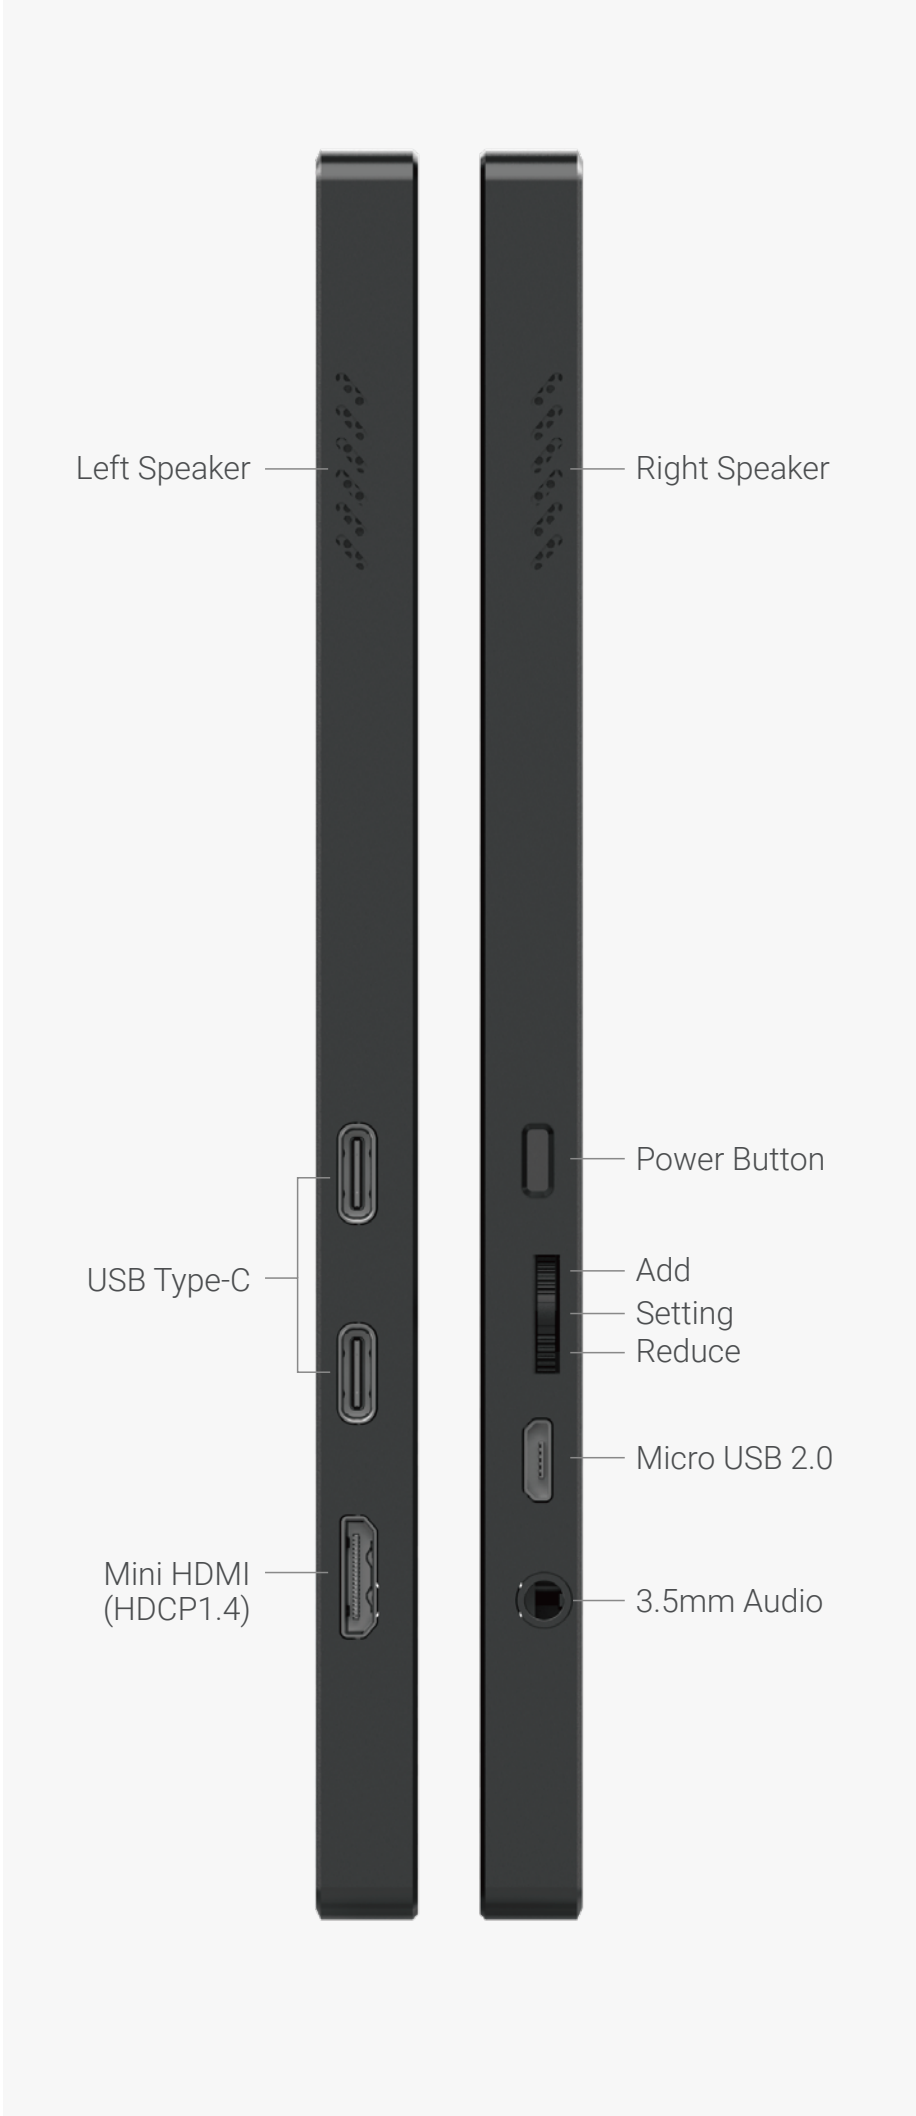

Specifications

Physical Parameter	Screen Size	10.5 inches
	Display Area	148 (V) × 222 (H) mm
	Aspect Ratio	15:10(H:V)
	Machine Dimension	232.9 (H) × 163.9 (V) mm
	Machine Weight	363g
	Material	Plastic
Display	Resolution	1920 (RGB) × 1280,FHD, 50-60Hz
	Pixel Arrangement	RGB Vertical Stripes
	Screen Brightness	20-400cd/m²
	Contrast Ratio	1500:1
	Response time	25ms
	Viewing Angle	85/85/85/85 (Typ.) (CR≥10)
	Recommended Viewing Angle	Full Viewing Angle
	HDR Technology	Support
	Free sync	Support
	Pitch (mm)	0.03855 × 0.11565 (H×V)
	Pixel Pitch	0.11565 × 0.11565 mm (H×V) [219PPI]
Color Performance	White Point Coordinate	Wx:0.265; Wy:0.254
	Color Temperature	17908K
	Supported Colors	16.7M (8-bit)
	Luminance Uniformity	1.25/1.54 (1M4ax.(5/13 Doints)-
Color Gamut	NTSC Ratio	0.72
	sRGB Coverage	1
	DCI - P3 Coverage	0.74
	Color Gamut Standard	sRGB (Rec.709, BT.709), Rec.2020 (BT.2020)
Touch	Touch Feature	Capacitive Touch
	Multi-Touch	10-Point Touch Supported
Audio Button	Speakers	Stereo 2.0, 8Q1W * 2
	Power	Short press to enter the menu or confirm, long press to return or turn off the screen. Long press when there is no signal to enterthe signal source selection.
	Setting	Short press to enter the Setting, then short press to confirm
	Add Reduce	Short press to increase brightness, then Reduce Button can reduce brightness Short press to reduce sound, then Add Button can increase sound
I/O Port	HDMI	Mini HDMI (HDCP1.4)
	USB Type-C	2 x USB Type-C Full-Featured, Input PD 65W, Output PD 47W
	Audio	3.5mm Audio Output
	Micro USB	Micro USB 2.0
Vesa	Type	Support 75mm Dual Hole
Environmental Characteristics	Operating Temperature:	0°C to 40°C
	Storage Temperature:	0°C to 60°C
	Operating Humidity:	10% to 80% (non-condensing)
	Storage Humidity:	5% to 90% (non-condensing)
Power	PD	5V2A